


Combustion Air Blowers

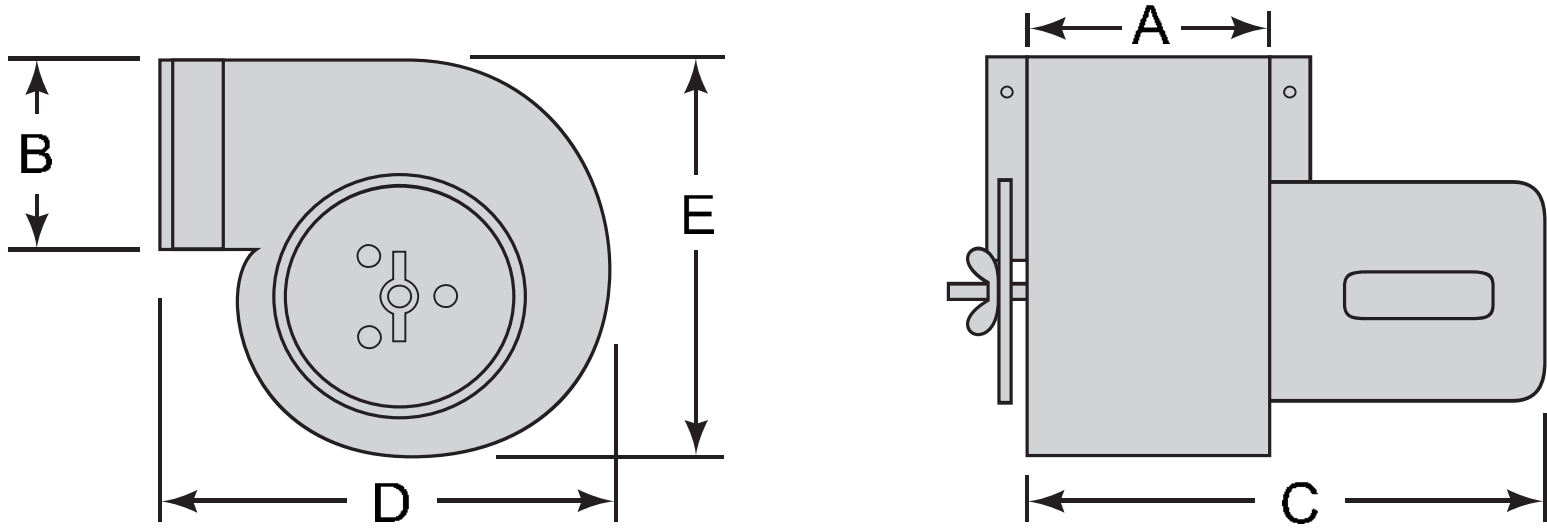

60 Hz Blowers

Used with Blower Cat. No.	Blower Cat. No.	Asy. No.	Rotor No.	Capacity CFH	Static Press "w.c.*	TEFC 230/460/60		
						HP	RPM	Part No.
AH0050 through AH0150	54-54S-1/3	109410	16328	20,000	1.90	1/3	3450	12109**
AH0200 through AH0300	65-84S-1/3	109241	16706	43,000	1.50	1/3	1750	12110
AH0350 through AH0400	66-94S-3/4	109243	10539-1	63,000	2.00	3/4	1750	11803

50 Hz Blowers

Used with Blower Cat. No.	Blower Cat. No.	Asy. No.	Capacity CFH	Static Press "w.c.*	Motor			
					kW	RPM	Part No.	Specifications
AH0050 through AH0100	MN 402	101293	20,000	1.2	0.25	2850	20519	230/440/3/50
AH0150 through AH0250	MN 502	101294	42,400	1.6	0.37	2850	20520	230/440/3/50
AH0300 through AH0400	MN 602	101295	74,200	1.6	1.10	2850	20523	230/440/3/50

* Additional capacity at reduced pressure. Static pressure measured at blower outlet using American Fan Association Standards.

** TENV Motor

60 Hz Blower


Dimensions inches (mm)	Blower Catalog Number		
	54-564S-1/ 3	65-84S-1/3	66-94S-3/4 66-94S-1
A	4.00 (102)	6.06 (154)	6.06 (154)
B	4.12 (105)	5.06 (129)	6.31 (160)
C 1/3 HP	12.25 (311)	14.62 (371)	-
C 3/4 HP	-	-	15.50 (394)
D	8.31 (211)	12.93 (329)	15.00 (381)
E	8.62 (219)	13.75 (349)	15.50 (394)
Wt. Lbs. (kg)	6.4 (3)	19.5 (9)	24.0 (11)

50 Hz Blower

Dimensions inches (mm)	Blower Catalog Number		
	MN 402	MN 502	MN 602
A	4.33 (110)	4.33 (110)	5.51 (140)
B	5.12 (130)	6.30 (160)	7.48 (190)
C	11.61 (295)	12.52 (318)	15.15 (385)
D	8.78 (223)	10.75 (273)	13.30 (338)
E	10.63 (270)	12.68 (322)	15.94 (405)
Wt. Lbs. (kg)	6.4 (3)	19.5 (9)	24.0 (11)

NOTE: Weight does not include motor.

Filters For AirHeat Burners

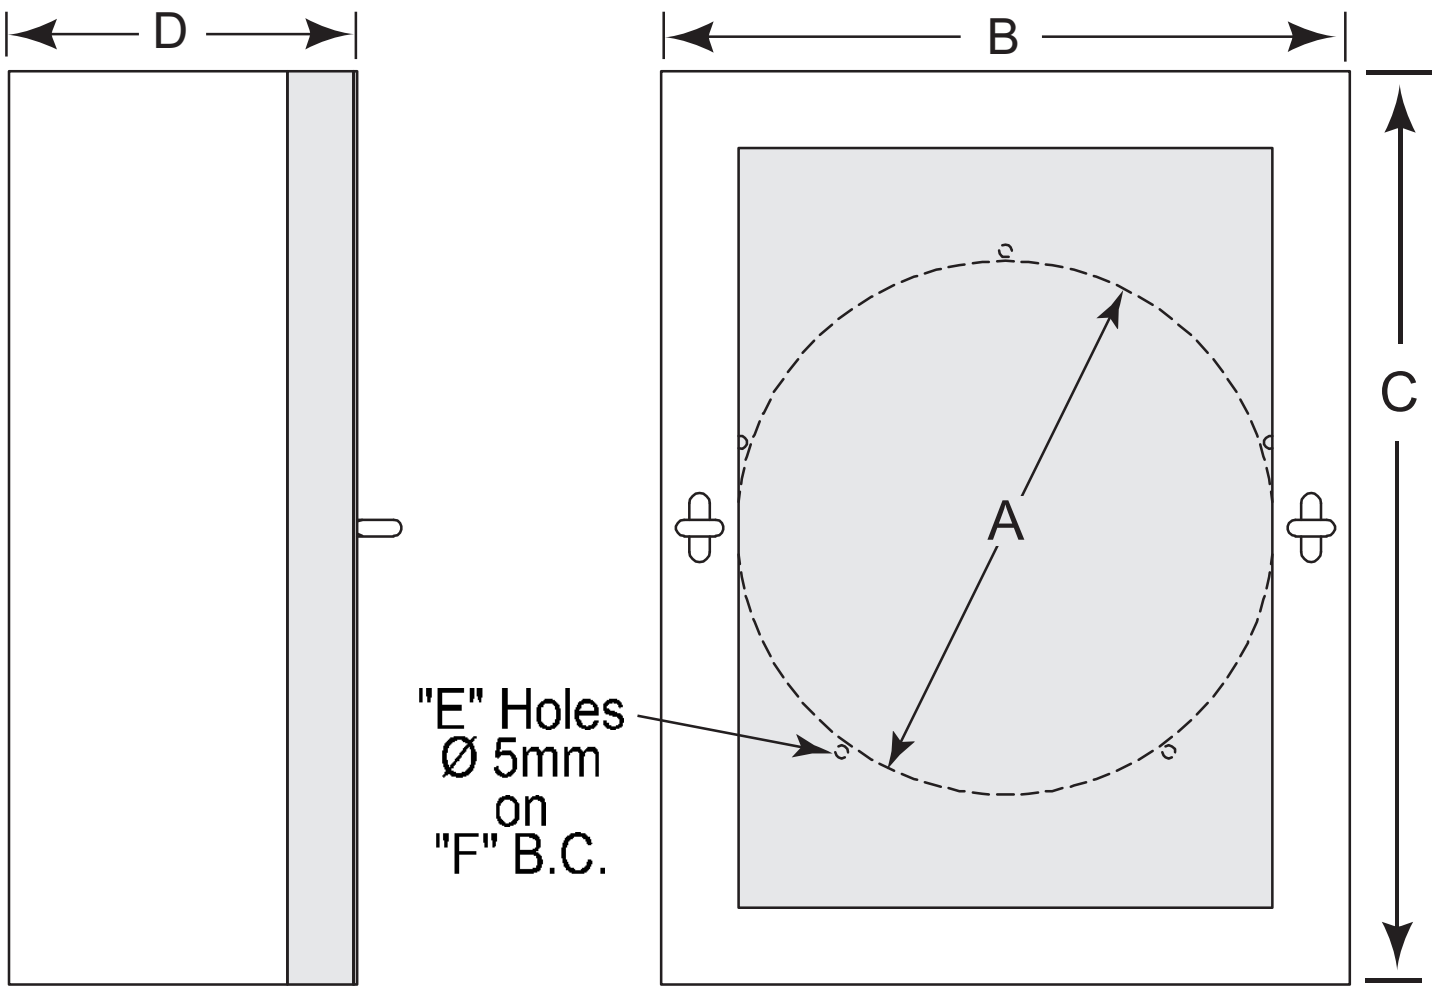

Blower Size	Used on Burner Size	Filter Cat. No.	Filter Asy. No.	Filter Media Asy. No.	Dimensions inches (mm)					
					A	B	C	D	E	F
54-54S	50 thru 150	2 AHFS	10009319	10009322	6.0 (150)	8.5 (216)	11.7 (298)	4.3 (110)	4	6.5 (165)
65-84S	200 thru 300	3 AHFS	10009261	10009271	8.0 (208)	10.5 (267)	14.0 (356)	5.3 (135)	5	8.5 (216)
66-94S	350 thru 400	4 AHFS	10009262	10009272	9.5 (241)	14.0 (356)	20.0 (508)	5.5 (141)	5	10.0 (254)